



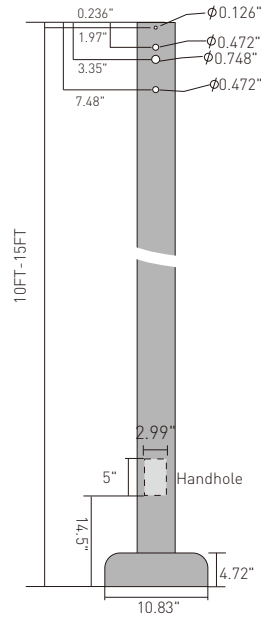

Date: Location:
Product: Project:
Quantity: Catalog#

10FT& 15FT Black Round Pole

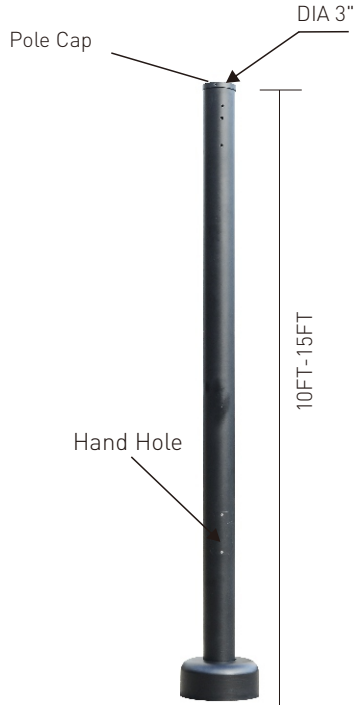

The Black Straight Round Steel poles are built from high strength steel tube and are available side drilled for arm mounted area lighting luminaires for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools public transit and airports, office buildings and medical facilities. Mounting heights of 10 to 30 feet can be used based on selected luminaires application.

Finish:

Textured architectural black powder coated finish, baked to ensure maximum paint adhesion, hardness and durability.

Hand Hole & Cover included:

Allows electricians to hook-up the wires from underground to the wires that power the light above.

Pole Length:

Poles are available in standard lengths and can be custom cut to order. Please Consult Factory.


Anchor Bolts:

Anchor Bolts are Included.

Base Cover:

Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base.



10FT & 15FT Black Round Pole



Template Base and anchor Bolts

Finish: Template black, Anchor bolts silver.

Before installing the lamp pole, the installation hook should be buried underground and fixed by cement. After fixing, the lamp pole should be fixed by locking screws and base installed.

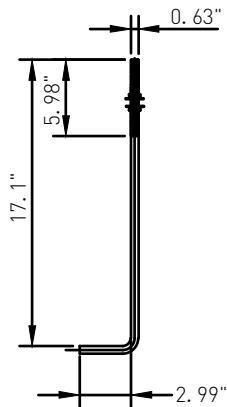

Base Cover

Finish: Black

The Installation of base cover is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.

Model No	Pole Dimensions			Base Plate	Anchor Bolt s	
	Nominal Mounting Height	Wall Thick (ga)	Structural Weight (lb)	Bolt Circle Diameter (in)	Dia x Length x Hook (in)	Projection (in)
RP10FTD3IN	10'	11	—	7.24"	0.63 x 17.1 x 2.99	5.98

Model No	Pole Dimensions			Base Plate	Anchor Bolt s	
	Nominal Mounting Height	Wall Thick (ga)	Structural Weight (lb)	Bolt Circle Diameter (in)	Dia x Length x Hook (in)	Projection (in)
RP15FTD3IN	15'	11	—	7.24"	0.63 x 17.1 x 2.99	5.98

Maximum EPA with 1.3 Gust Factor (ft ²)					Pole weight (lbs)
70mph 10/15ft	80mph 10/15ft	90mph 10/15ft	100mph 10/15ft	110mph 10/15ft	
25/17	22/14	19/12	15/10	11/7.8	103