





20FT/25FT Black Round Pole Ga11

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog# _____

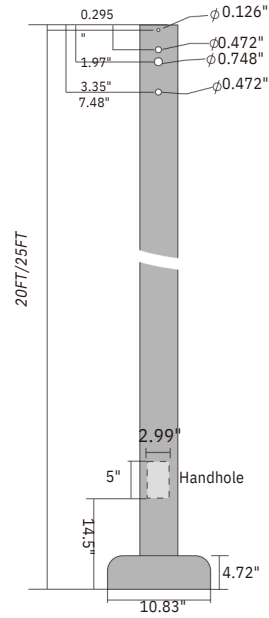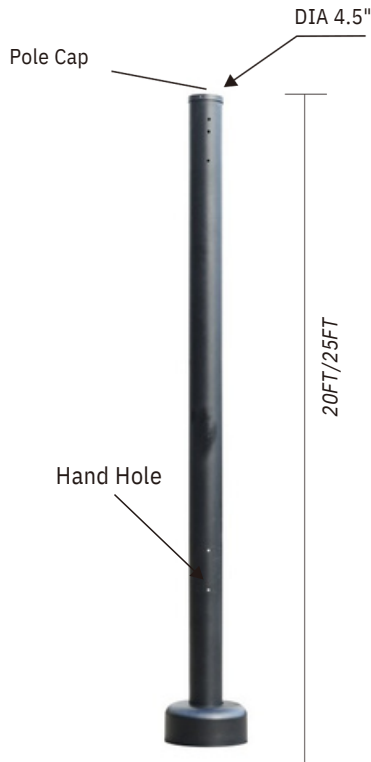

The Round Black Steel poles are built from high strength steel tube and are available side drilled for arm mounted area lighting luminaires for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools, public transit and airports, office buildings and medical facilities. Mounting heights of 10 to 30 feet can be used based on selected luminaires.

Finish:

Textured architectural black powder coated finish, baked to ensure maximum paint adhesion, hardness and durability.

Anchor Bolts:

Anchor Bolts are Included.

Hand Hole & Cover included::

Allows electricians to hook-up the wires from underground to the wires that power the light above.


Base Cover:

Poles are provided with a steel base cover that is easily assembled and fitted over pole base.

Pole Length:


Poles are available in standard lengths and can be custom cut to order. Please Consult Factory.

20FT/25FT Black Round Pole Ga11

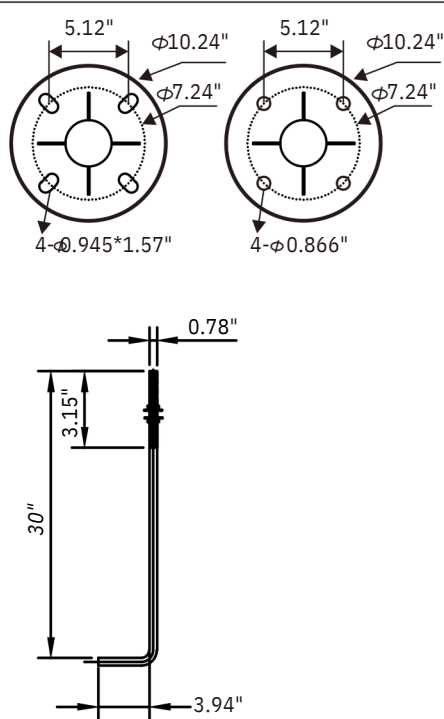

Template Base and Anchor bolts

Finish: Template black, Anchor boltssilver.
Before installing the lamp pole, the installation hook should be buried underground and fixed by cement, After fixing, the lamp pole should be fixed by locking screws and base installed.



Base Cover

Finish: Black,
The 4.5" Installation of base shield is used to protectthe base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.

Model No	Pole Dimensions			Base Plate	Anchor Bolts	
	Nominal Mounting Height	Wall Thick (ga)	Structural Weight lb	Bolt Circle Diameter (in)	Dia x Length x Hook (in)	Projection(in)
RP20FTD4.5IN	20'	11	—	7.24-10.24"	0.78 x 30 x 3.94"	3.15"

Model No	Pole Dimensions			Base Plate	Anchor Bolts	
	Nominal Mounting Height	Wall Thick (ga)	Structural Weight lb	Bolt Circle Diameter (in)	Dia x Length x Hook (in)	Projection(in)
RP25FTD4.5IN	25'	11	—	7.24-10.24"	0.78 x 30 x 3.94"	3.15"

20FT
Maximum EPA

with 1.3 Gust Factor (ft ₂)					Pole weight (lbs)
80mph	90mph	100mph	110mph	120mph	
8.5	6.6	5.1	3.3	2.3	152

25FT
Maximum EPA

with 1.5 Gust Factor (ft ₂)					Pole weight (lbs)
80mph	90mph	100mph	110mph	120mph	
7.9	6.6	5.2	4.5	3.0	227