



White Area / Shoebox LED light



Date:..... Location:

Product:..... Project:.....

Quantity:..... Catalog#

FEATURES

- White housing for white pole,Multiple mounts Available.
- 100-277V or 480V input voltage available.
- Low profile housing with enhanced thermal heat sink.
- 6KV built-in plus 10kV external surge protection
- 50,000hrs Life time.

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with white powder-coated finish.

OPTICALSYSTEM:

High brightness lumileds LED chips.
Special PC lens with TYPE III and TYPE V distribution

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

ELECTRICAL:

Available as 120-277V or 480V input. -20°C to 45°C,

INSTALLATION&MOUNTING:

Adjustable Slip filters, arm mounts or trunion mounts available for easy installation.

CONTROLS&DIMMING

0-10V dimming comes standard.

Model NO	Wattage	BUG	Voltage/CurrentInput			Light Efficiency	Kelvin Options
			120V	277V	480V		
LS- ESBV7E100WAT3A1	100W	B3-U0-	0.83A	0.36A	0.20A	140LM/ W	3000K/4000K/5000 K
LS- ESBV7E150WAT3A1	200W	U0-G3	1 .66A	0.72A	0.41A	140LM/ W	3000K/4000K/5000 K
LS- LS-ESBV7E300WAT3A1 ESBV7E200WAT3A1	300W	G3 B4- U0-G4	2.50A	1.08A	0.62A	140LM/ W	3000K/4000K/5000 K
LS- ESBV7E240WAT3A1		B4-U0- G4				140LM/ W	3000K/4000K/5000 K
						140LM/ W	3000K/4000K/5000 K

Optional Mount Bracket:



AM Adjustable Slipfitter



DM Direct Mount



YM Yoke Mount

Optional Functions:



Occupancy sensor options

Photocell sensor options




Electric Characteristic

Specification/Model	LS-ESBV7E100WAT3A1	LS-ESBV7E150WAT3A1	LS-ESBV7E200WAT3A1	LS-ESBV7E240WAT3A1	LS-ESBV7E300WAT3A1
LED Driver	UL listed BECKY Brand 0-10V dimmable				
Input power	100W	150W	200W	240W	300W
Lumens output	14000LM	21000LM	28000LM	33600LM	42000LM
Efficiency	140LM/W	140LM/W	140LM/W	140LM/W	140LM/W
CRI	>72	>72	>72	>72	>72
Color Temperature	5000K	5000K	5000K	5000K	5000K
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	TYPE III or TYPE V	TYPE III or TYPE V	TYPE III or TYPE V	TYPE III or TYPE V	TYPE III or TYPE V
Working temperature	-20+45°C	-20+45°C	-20+45°C	-20+45°C	-20+45°C
Junction temperature	<75°C	<75°C	<75°C	<75°C	<75°C
lamps efficiency	≥90%	≥90%	≥90%	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC	UL CUL DLC	UL CUL DLC	UL CUL DLC
Equivalent	200-300W MH/HPS	300-450W MH/HPS	450-600W MH/HPS	600-800W MH/HPS	800-1000W MH/HPS


► Electric Characteristic

Specification/Model	LS-ESBV7150WCT3H1	LS-ESBV7300WCT3H1
LED Driver	UL listed SOSEN LED DRIVER 0-10V dimmable	
Input power	150W	300W
Lumens output	21000LM	42000LM
Efficiency	140LM/W	140 ^M L ^M /W
CRI	>72	>72
Color Temperature	5000K	5000K
Input voltage	277-480V/AC	277-480V/AC
Light distribution type	TYPE III or TYPE V	TYPE III or TYPE V
Working temperature	20+45°C	20+45°C
Junction temperature	<75°C	<75°C
lamps efficiency	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC
Equivalent	30-45 00W MH/HPS	800-1000WMH/HPS

► DIMENSION

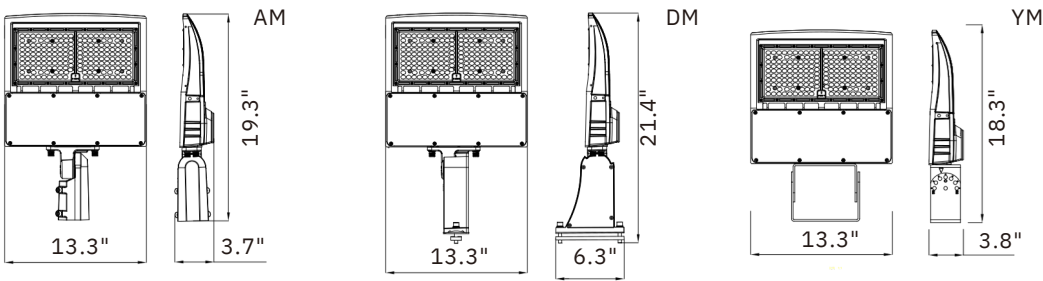


100W/150W

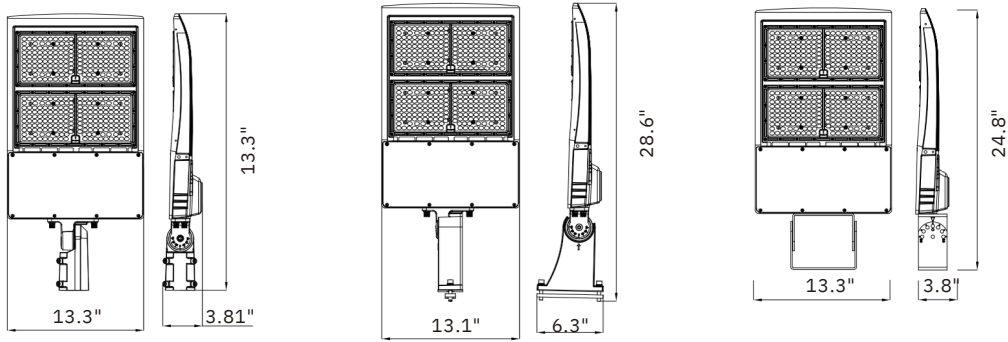

200W/240W/300W

DISTRIBUTION DIAGRAM

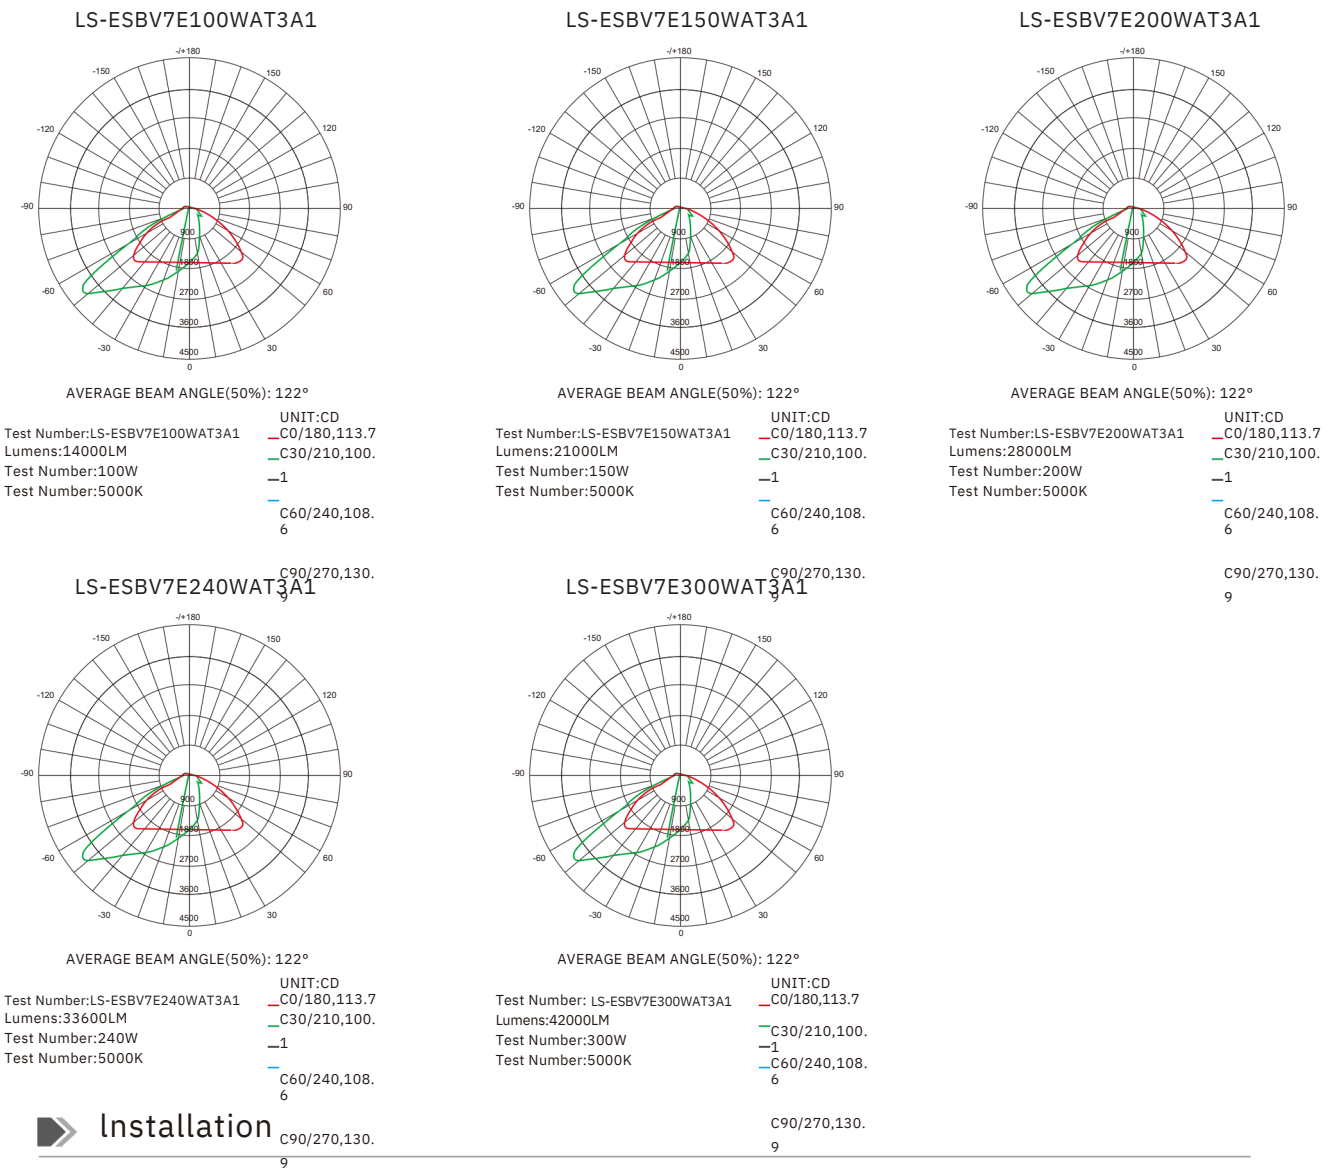

Installation

1.ADJUSTABLE FITTER MoUNTING (AM)

- Step 1:Loosen the four bolts on AM bracket, connect the wires correctly, and pull the wires into the poles.(Figure 1)
- Step 2: Place the bracket into the pole and lock the four bolts.(Figure 2)
- Notice: Adjustable angle is 0-90°(Figure 1)

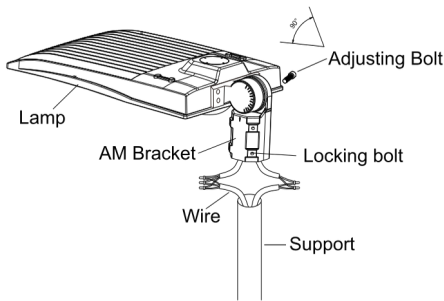


Figure 1

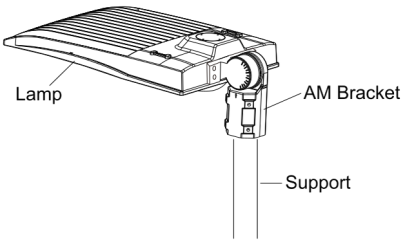


Figure 2

2.DIRECT MOUNTING (DM)

Step 1: Fix DM bracket to square pole with bolt, open the side lid of DM bracket, pull the wire into junction box, and connect the wire correctly. (Figure 3)

Step 2: Put the connected wire into the junction box, then cover the junction box. (Figure 4)

Notice: Adjustable angle is 0-35° (Figure 3).

Same as round pole installation, please remember to remove the silicon plate when install the fixture in round pole (Figure 5)

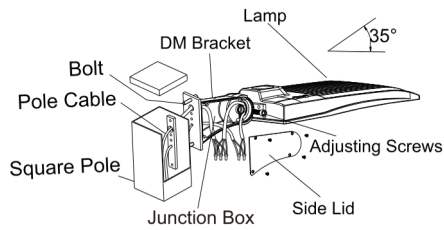


Figure 3




Figure 4




Figure 5

3.YOKE MOUNTING (YM)

Step 1: Drill holes on the wall as shown. (Figure 6)

Step 2: Knock the expansion bolts into the wall. (Figure 7)

Step 3: Connect the fixture to the bracket and tighten the screws; connect the wires properly and put them into junction box. (Figure 8)

Notice: Adjustable angle is 0-90° (Figure 8)




Figure 6




Figure 7




Figure 8