



5Watts 3CCT 500W Shoebox LED light

Date:..... Location:

Product:..... Project:.....

Quantity:..... Catalog#



FEATURES

- 300/350/400/450/500W led tunable, 3/4/5K selectable.
- Default Slip filter mount, pole/trunion mounts optional.
- 100-277V or 480V input voltage available.
- 6KV built-in surge protection
- DLC PREMIUM, 50,000hrs Life time.

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with bronze powder-coated finish.

ELECTRICAL:

Available as 120-277V or 480V input. -20°C to 45°C,

OPTICAL SYSTEM:

High brightness lumileds LED chips.
Special PC lens with TYPE III and TYPE V distribution

INSTALLATION&MOUNTING:

Slip filter/Pole Mount/Trunion mounts for easy installation.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

CONTROLS&DIMMING

PERFORMANCE

Model NO	Wattage	BUG	Voltage/CurrentInput		Light Efficiency	Kelvin Options
			120V	277V		
SB10-24-500L-D5C3T3	300W	B5-U0-G5	2.50A	1.08A	160LM/W	3000K/4000K/5000K
	350W	B5-U0-G5	2.92A	1.26A	W	K
	400W	B5-U0-G5	3.33A	1.44	160LM/W	3000K/4000K/5000K
	450W	B5-U0-G5	3.75A	A	W	K
	500W	B5-U0-G5	4.16A	1.62	160LM/W	3000K/4000K/5000K
			A		W	K
			1.81		160LM/W	3000K/4000K/5000K
			A		W	K
					160LM/W	3000K/4000K/5000K
					W	K

ElectricCharacteristic

OPTIONAL ACCESSORIES

PRODUCT ORDERING GUIDE

SB10-24-500L-D5C3T3

1	2	3	4
SB10-24	500L	D5C3	T3

☒ SB10-24

Item code

☒ 500L

W attage 300/350/400/450/500W

☒ D5C3

denotes 0-10 V dimming driver, 5 watts tunable and 3CCT selectable

☒ T3

represents diffuser light angle

Watt&CCT Tunable

300W 350W 400W 450W 500W

☒

☐

☐

☐

☐

Power


3000K 4000K 5000K

☐

☐

☒

CCT

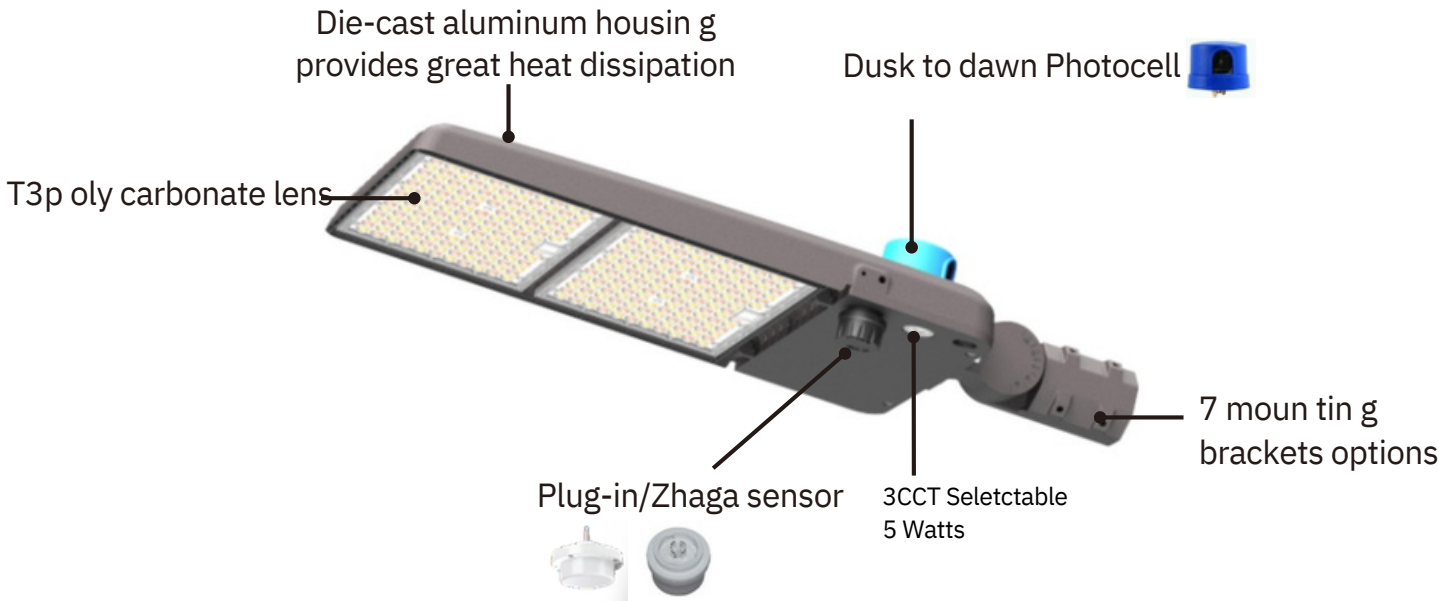


5Watts 3CCT 500W Shoebox LED light



Electric Characteristic


Specification/Model	SB10-24-500L-D5C3T3				
LED Driver	UL listed SOSEN Brand 0-10V dimmable				
Input power	300W	350W	400W	450W	500W
Lumens output	48000LM	56000LM	26000LM	72000LM	80000LM
Efficiency	160LM/W	160LM/W	160LM/W	160LM/W	160LM/W
CRI	>80	>80	>80	>80	>80
Color Temperature	3000K 4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	TYPE III	TYPE III	TYPE III	TYPE III	TYPE III
Working temperature	-20+45°C	-20+45°C	-20+45°C	-20+45°C	-20+45°C
Junction temperature	<75°C	<75°C	<75°C	<75°C	<75°C
lamps efficiency	≥90%	≥90%	≥90%	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC	UL CUL DLC	UL CUL DLC	UL CUL DLC
Equivalent	10001500W MH/HPS	10001500W MH/HPS	10001500W MH/HPS	10001500W MH/HPS	10001500W MH/HPS

DIMENSION

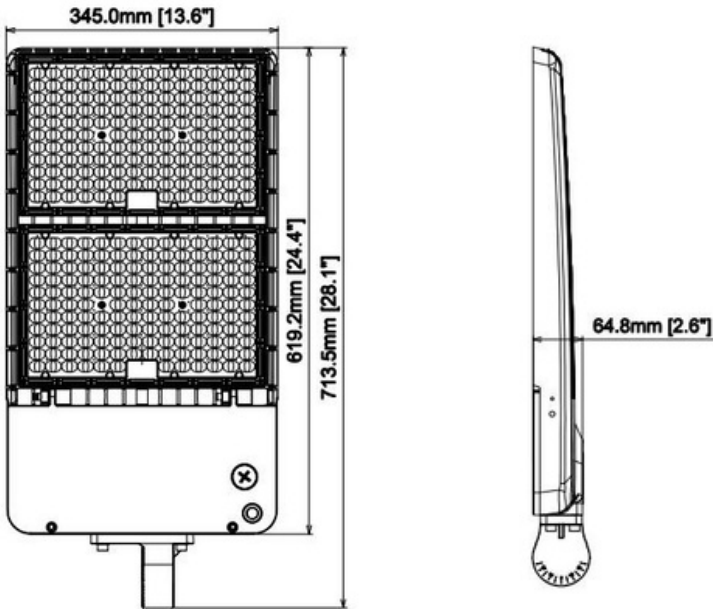

300W/350W/400W/450W/500W

DISTRIBUTION DIAGRAM

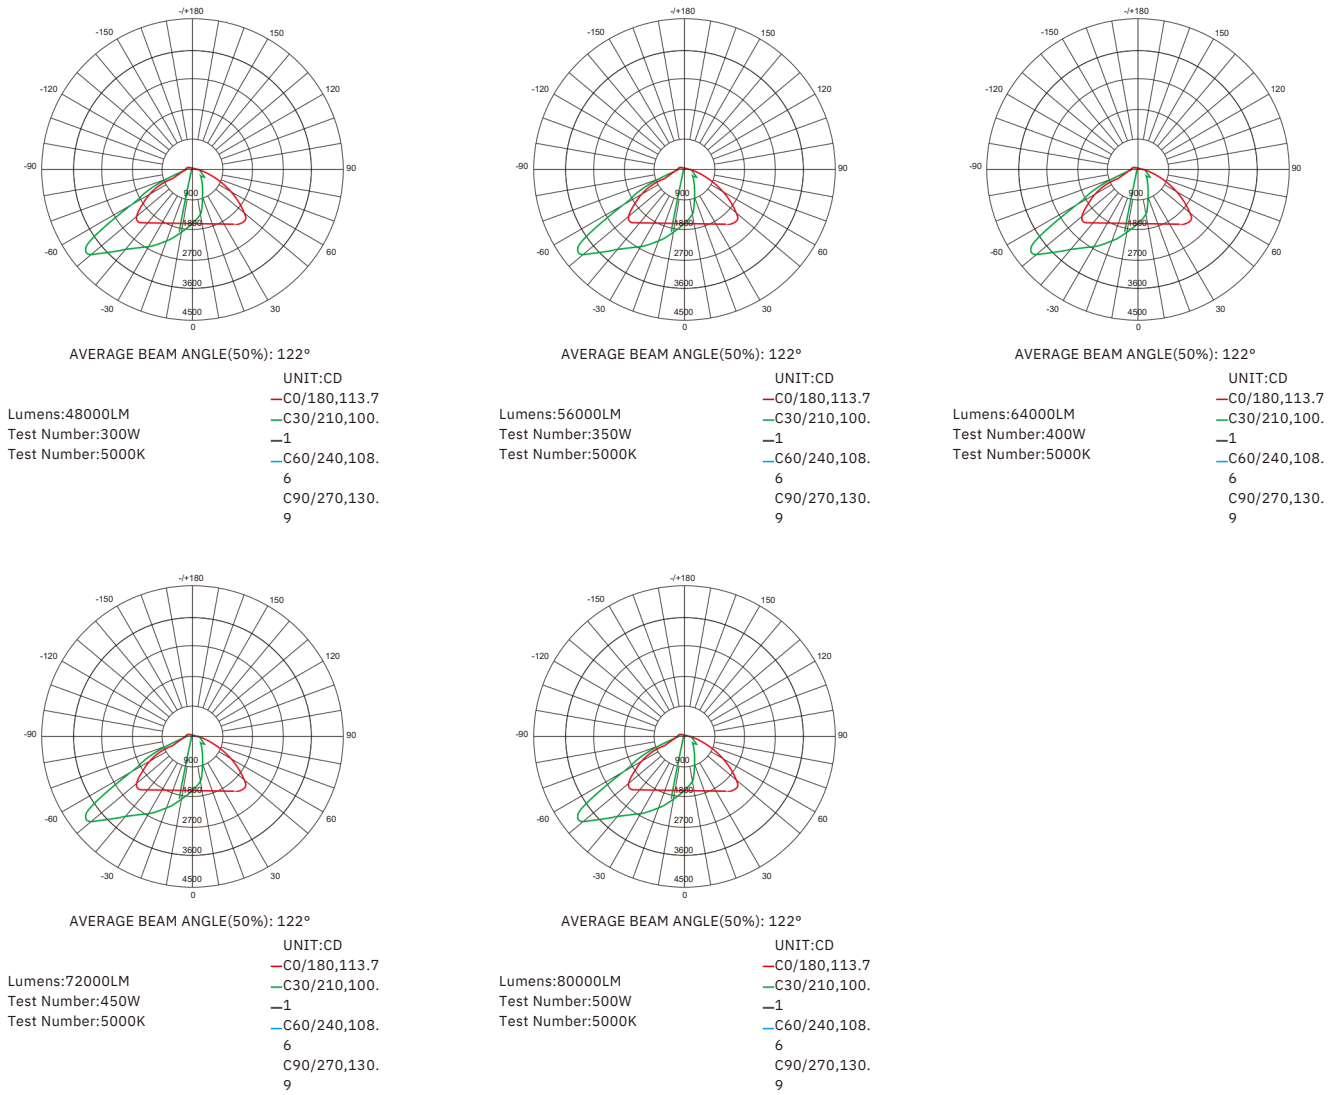

► Installation

1.ADJUSTABLE FITTER MOUNTING (AM)

Step 1: Loosen the four bolts on AM bracket, connect the wires correctly, and pull the wires into the poles.(Figure 1)

Step 2: Place the bracket into the pole and lock the four bolts.(Figure 2)

Notice: Adjustable angle is 0-90°(Figure 1)

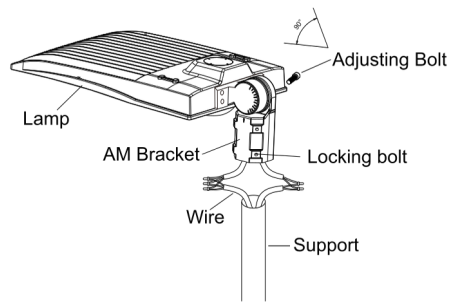


Figure 1

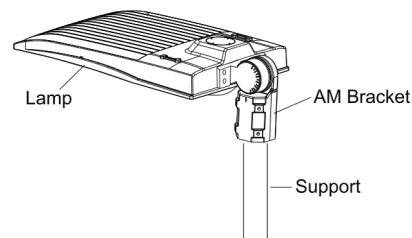


Figure 2