



5Watts 5CCT LED Troffer Light



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog# _____

FEATURES

- 5 Watts 5CCT adjustable panel. Plug & Play Sensor
- Easy install by Recessed or surface mounts.
- Built-in junction box Fits standard T-grid ceilings
- Optical lenses over LED chip, pc cover never yellow over time.
- 50,000hours Life time.

SUITABLE APPLICATIONS

- Office Lighting
- Meeting room lighting
- Store lighting
- Restaurant lighting

CONSTRUCTION:

Quality white Aluminum heat sink and high transmission PC cover.

ELECTRICAL:

Available as 120-277V input,0-10v dimmable. -25°C to45°C.

OPTICALSYSTEM :

High brightness lumileds LED chips as backlit lighting solution.

INSTALLATION&MOUNTING:

Suspended Ceiling Mounting/ Frame Flash Mounting

WARRANTY:

5-year limited warranty. Actual performance maydiffer as a result of end-user environment and.application.

PERFORMANCE

Model NO	SIZE	Wattage	Voltage	Light Efficiency	Kelvin Options
LS- TF22M40W5CCT	2X 2	15/20/25/30/40W 25/30/35/40/50W	100- 277V	5200LM at 40W 50K 6500LM at 50W 50K	35/40/50/57/65 K
LS- TF24M50W5CCT	2X 4		100- 277V		35/40/50/57/65 K

5Watts 5CCT LED Troffer Light



Electric Characteristic


Specification/Model	LS-TF22M40W5CCT	LS-TF24M50W5CCT
LED Driver	UL listed Driver 0-10 dimmable	
Input power tunable	15/20/25/30/40W	25/30/35/40/50W
Lumens output	5200LM at 40W 50K	5200LM at 40W 50K
Efficiency	130LM/W	130LM/W
CRI	>80	>80
Color Temperature	35/40/50/57/65K Tunable	35/40/50/57/65K T unable
Input voltage	120-277V/AC	120-277V/AC
Light distribution type	110D	110D
Working temperature	-25+45°C	-25+45°C
Junction temperature	<75°C	<75°C
lamps efficiency	≥90%	≥90%
Certificate	ETL CETL DLC	ETL CETL DLC
Equivalent	36-110W MH/HPS	56-150W MH/HPS

Electric Characteristic

OPTIONAL ACCESSORIES




Emergency Battery Backup.Style
LSED20W

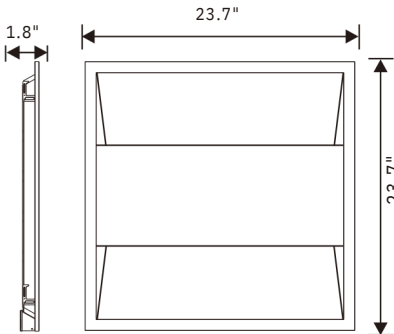

SENSOR ACCESSORIES




Occupancy Motion Sensor
Plug & Play
(PRE-ORDER FROM FACTORY)

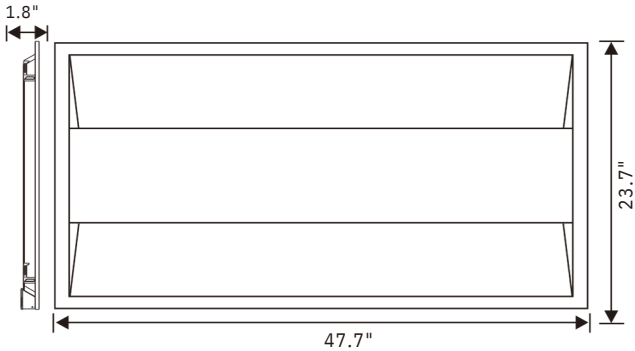

5Watts 5CCT LED Troffer Light




DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1


Lumens:3250LM
Test Number:25W
Test Number:5000K



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1


Lumens:3900LM
Test Number:30W
Test Number:5000K



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1


Lumens:4550LM
Test Number:35W
Test Number:5000K



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1


Lumens:5200LM
Test Number:40W
Test Number:5000K



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1

Lumens:5850LM
Test Number:45W
Test Number:5000K



AVERAGE BEAM ANGLE(50%): 110°

UNIT:CD
—C0/180,110.9
—C30/210,110.5
—C60/240,109.3
—C90/270,109.1

Lumens:6500LM
Test Number:50W
Test Number:5000K