

COMBO EMERGENCY EXIT SIGN ES082

Date:..... Location:

Product:..... Project:.....


Quantity:..... Catalog#



► Electric Characteristic

Model NO	Input Wattage	Input Current	Efficiency	Recharge Time	Output Wattage	Light Source	Lead-Acid Battery	Emergency duration	Product Size
LS-ES082	4W	0.03A	0.97P	24H	2*2W	Ultra bright LED	3.6V/600mAh	>90mins	11.02"*4.56"*2.67"

► DIMENSION

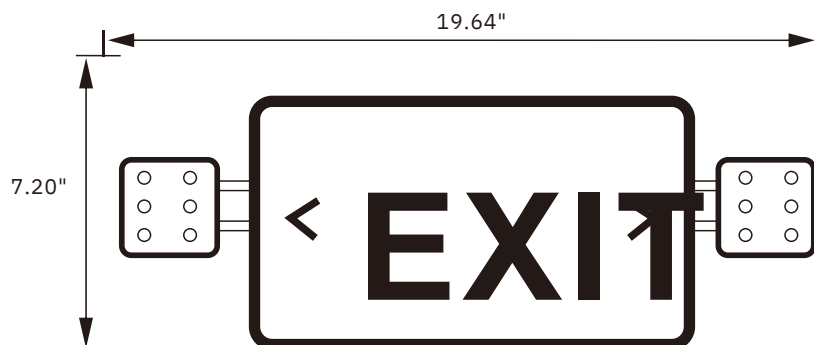

IMPORTANT SAFETY GUIDES

- When using electrical equipment, basic safety precautions should always be followed including the followings
- When using electrical equipment, Turn off all electrical power before installation.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- When using electrical equipment, basic safety precautions should always be followed, including the following:
- Read and follow all safety instructions.
- Disconnect power before performing work on electrical equipment.
- Do not use outdoors.
- Do not let power cords touch hot surfaces.
- Do not install in hazardous locations or near gas or heaters.
- Do not use this equipment for other than its intended purpose.
- Servicing of this equipment should be performed by qualified service personnel.
- Equipment shall be mounted in locations and heights where it will not be subject to tampering by unauthorized personnel.

COMBO EMERGENCY EXIT SIGN ES082

Date:..... Location:

Product:..... Project:.....


Quantity:..... Catalog#

Mounting Instructions


NOTE: First turn off electricity.

Wall mounting


- 1.Open the EXIT housing and diffuser with a screw driver.

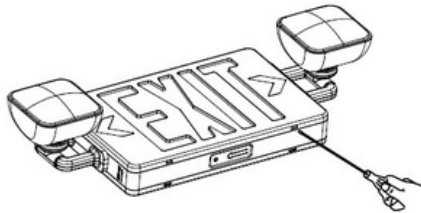

- 2.Knock out in back of mounting plate and push wires through the hole.

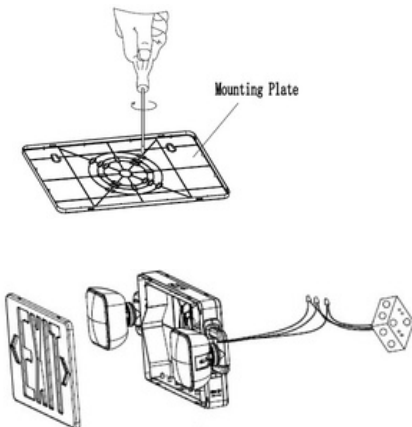


- 3.Make the proper supply lead connections. If using 120vAC, connect the black and white leads to the building utility. If using 277VAC, connect the orange and white leads to the building utility.Cap off unused wire. If the unit is self-powered ,be sure to snap battery connector together.

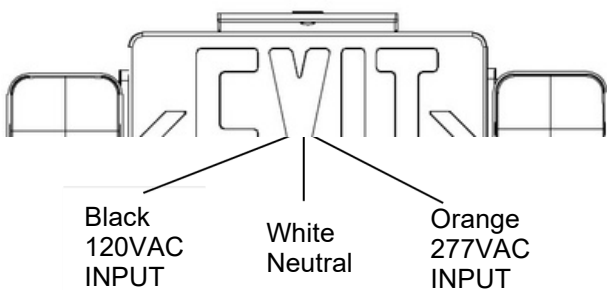

- 4.Snap fixture onto mounting plate and ensure no wires are pinched . Make sure unit is fully attached.
- 5.Restore power and press test button. Battery powered LED will come on,AC light will turn off.

Ceiling mounting

- 1.Open the EXIT housing and knockout on the top of fixture.
- 2.Knock out in top of mounting plate and push wires through the hole.

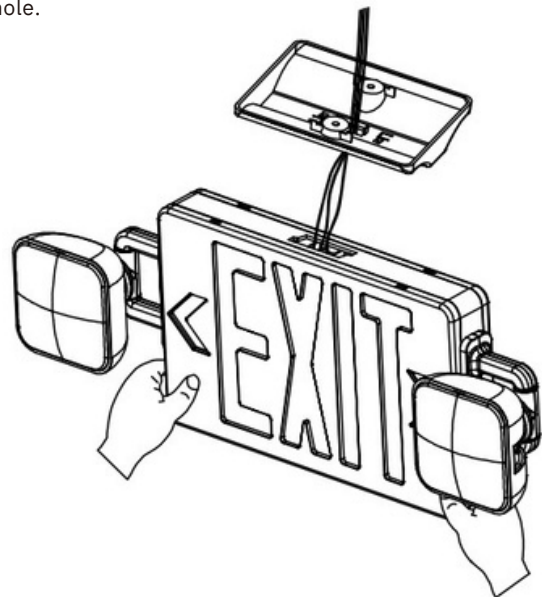

- 3.Reference step 3 - 5 in wall mounting above for ceiling mounting.