



3WATTS 3CCT LED WRAP AROUND

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog# _____

FEATURES

- 4ft 30/40/50W 3/4/5K tunable wrap, EM available
- 5.9" wide, Easy installation and maintenance
- Corrosion and rust proof. IP40 RATED DLC UL
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Indoor office Lighting
- Hospital lighting
- Shopping malls
- School lighting
- Warehouse lighting
- Hallway lighting



CONSTRUCTION:

Dieformed of 0.6mm cold-rolled steel body, All steel surface painted after fabrication with high gloss backed white powder painted extruded opal prismatic material with uv protection. End caps: white pc material.

ELECTRICAL:

Available as 120-277V input. dim 0-10V-22°F to 104°F.

INSTALLATION & MOUNTING:

Surface mount or Suspension Mount (order extra)

OPTICAL SYSTEM:

High brightness 2835 LED chips. High quality tempered glass optics. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment application.

PERFORMANCE:

Model NO	SIZE	3 Watts Select	Voltage	Light Efficiency	3 CCT Select
LS-WRA50W-TN	4FT	30W/40W/50W	120-277V	115LM/W	3500K/4000K/5000K

Electric Characteristic


Model	Certificate	Input power	Lumens output	Efficiency	CRI	Color Temperature	lamp efficiency	Equivalent
LS-WRA50W-TN	UL DLC	30W/40W/50W	3450/4600/5750LM	115LM/W	>80	3500-5000K	≥ 90%	115-150W MH/HPS

OPTIONAL ACCESSORIES



Emergency Battery Backup:
LSED8W60300V


Electric Characteristic



WARNING

- 1. The installation and maintenance must be completed by electricians or professionals.
- 2. Please cut off the power before installation and maintenance.
- 3. The thermally insulating material is not allowed to cover the fixture.
- 4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5. Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.

DISTRIBUTION DIAGRAM

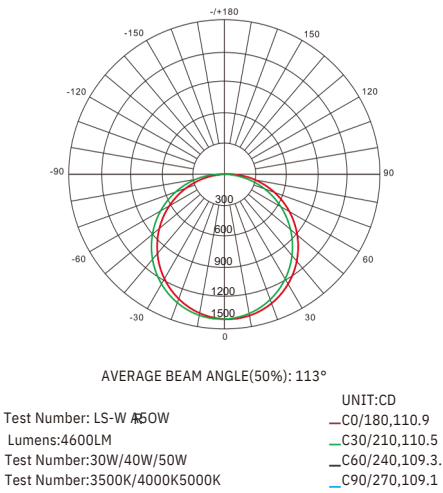


PACKAGE WEIGHT

Model No	Size	Master Carton Size	Qty/Carton	Weight
		LxWxH		LBS
LS-WRA50W-TN	4FT	48.62 "X 13.58 "X 10.04 "	4	20.3lbs


LED Wraparound

Installation

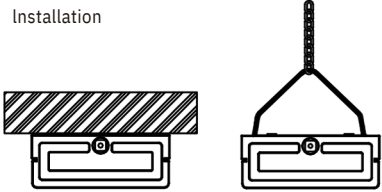


Surface Mounting Suspension Mounting


1

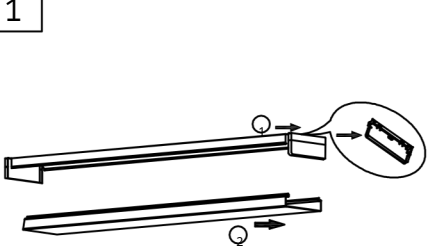

2

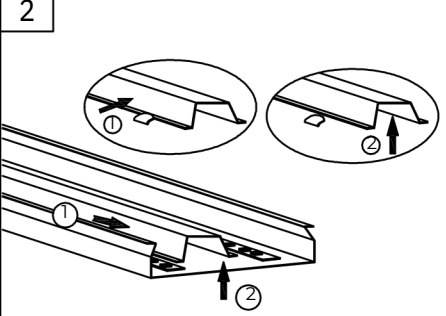


3

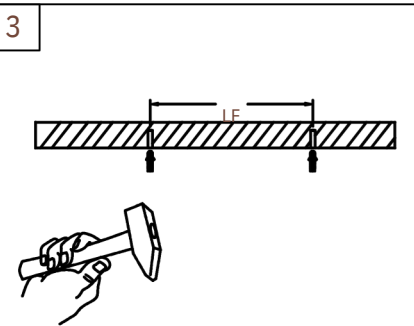

4

Surface Mounting

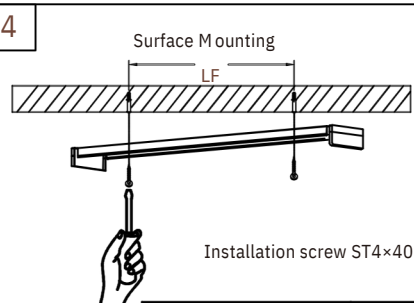


Installation screw ST4×40

Type Desc	LF(MM)
LS-WRA50W-35/40/50K	938

5


Surface Mounting

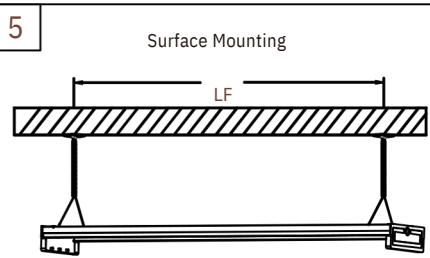

Autogamy hanging rope

Type Desc	LF(MM)
LS-WRA50W-35/40/50K	1115

6

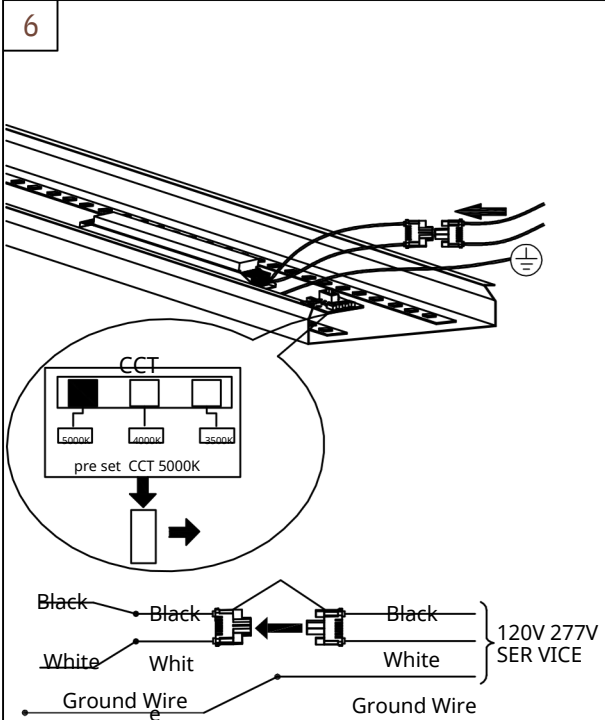

CCT

CCT
3000K
4000K
5000K

pre set CCT 5000K


Black Black Black

White White White

Ground Wire Ground Wire

120V 277V
SER VICE

7

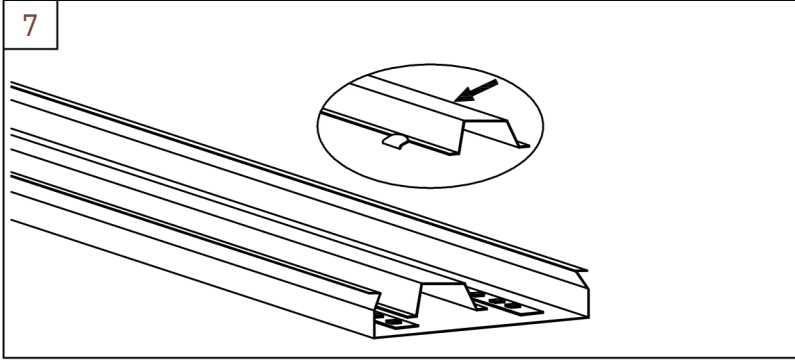

8

